

TDM-IPMUX

Overview

As a cost effective solution for the traditional telecom services migrate to the IP packet networking technology, TDM-IPMUX-04/08/16 adopts the innovative TDM over IP technology, with IP circuit emulation that supports transportation of 4/8/16 E1 over FE port. The uplink ports and user data ports are IEEE 802.3 compliant, 10/100 auto-sensed Ethernet ports.



TDM-IPMUX-04




TDM-IPMUX-08

State-of-the-art design provides the highest availability with the accurate timing signal and data bit stream reconstruction. Predefined system parameter profiles that according to different application requirement; ultimately simplify the installation process and saving the maintenance cost.

Telecom and Enterprise users can save a lot of access and equipment costs and generates new revenue by offering different types of service over existing Ethernet networks. It is also suitable for connecting to the wireless equipment to achieve fast deployment of E1 services. One particular application is to build E1 links with low cost Wireless LAN bridges, replacing much more costly microwave radios. Operators can use TDM-IPMUX-04/08/16 to provide legacy TDM services over wired or wireless packet network

Product Characteristics


1. Support IETF RFC4553 SAToP protocol, Ethernet encapsulation support IP/UDP.
2. Provide 4 FE electrical ports and 1 FE optical port, 2 uplink ports, 2 user data ports or monitoring ports, optical port can be used for uplink or user data.
3. User-friendly Web server supported for easy setup and maintenance
4. Support SNMP V1/V2 network management





Your Route to The Destination

5. E1 clock supports 3 mode: local clock, adaptive and loopback
6. E1 service support lossy and lossless protection
7. Ethernet built-in layer 2 switch, support VLAN (port based, 802.1Q based and QinQ based), QoS(port based、802.1P based、MAC based and TOS based).
8. Ethernet support IEEE 802.3x, RSTP (802.1w), LLDP, CDP, Ethernet ring protection, OAM and MAC address automatic learning
9. Ethernet packet size up to 9720byte
10. Point to point and point to multipoint supported
11. Local Ethernet port throughput limiting
12. Software and hardware online upgrade
13. Power supply redundancy

Item	Description	
Model	TDM-IPMUX-04/08/16	2 PWR slots 1 E1 interface slot 1 Ethernet uplink slot
Service card	Ethernet uplink card	4 FE electrical ports and 1 FE optical port Comply with IEEE 802.3, 802.1Q, 802.1P, 802.3x Speed and duplex auto-negotiation or manual
	E1 card	TDM-IPMUX-04: 4 E1 ports TDM-IPMUX-08: 8 E1 ports TDM-IPMUX-16: 16 E1 ports
Power	Supply	2 power slots
		AC 220v power module
		DC -48v power module
	Consumption	≤40W
Working Environment	Temperature	0~ 50°C
	Relative Humidity	≤90% (non-condensing)
Dimension	W x H x D (mm):	1U: 440 x 44 x 135 (mm)



Typical Application:

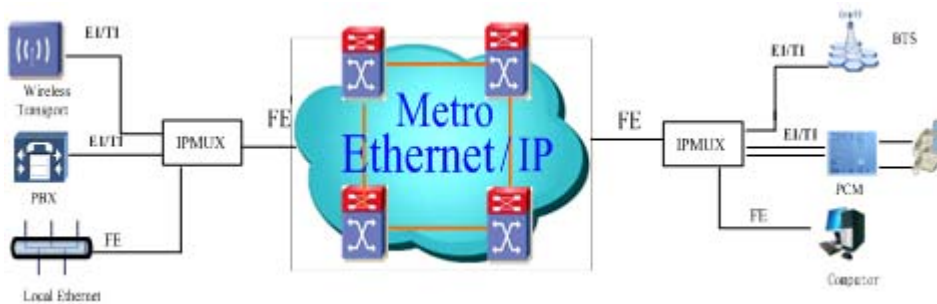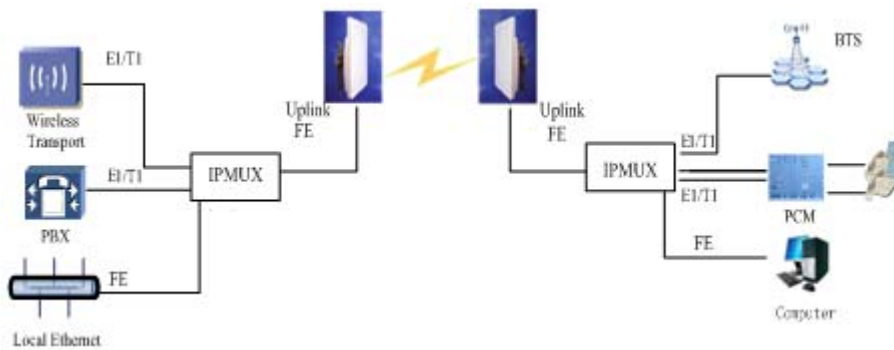

Order Information:

TDM-IPMUX-04-AC	4*E1,4*10/100Base-Tx,1*SFP with 220VAC Power Supply
TDM-IPMUX-04-DC	4*E1,4*10/100Base-Tx,1*SFP with -48VDC Power Supply
TDM-IPMUX-04-AC & DC	4*E1,4*10/100Base-Tx,1*SFP with 220VAC & -48VDC Power Supply
TDM-IPMUX-08-AC	8*E1,4*10/100Base-Tx,1*SFP with 220VAC Power Supply
TDM-IPMUX-08-DC	8*E1,4*10/100Base-Tx,1*SFP with -48VDC Power Supply
TDM-IPMUX-08-AC & DC	8*E1,4*10/100Base-Tx,1*SFP with 220VAC & -48VDC Power Supply
TDM-IPMUX-16-AC	16*E1,4*10/100Base-Tx,1*SFP with 220VAC Power Supply
TDM-IPMUX-16-DC	16*E1,4*10/100Base-Tx,1*SFP with -48VDC Power Supply
TDM-IPMUX-16-AC & DC	16*E1,4*10/100Base-Tx,1*SFP with 220VAC & -48VDC Power Supply

